

**MTH**  
**frigorifeni**

**NEW**



**ARMADI FRIGORIFERI COMPONENTI**  
**REFRIGERATED CABINET ELEMENTS**


**MBA - 10** (Bassa Temperatura - *Low Temperature*)

**MBA - 06** (Temperatura Positiva - *Positive Temperature*)

# MODULAR SYSTEM



Vers. D

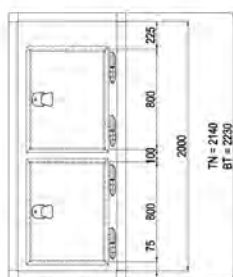


Vers. H

PORTA STANDARD  
STANDARD DOOR

**610 x 1700 mm**

SPORTELLO STANDARD  
STANDARD HATCH

**610 x 800 mm**

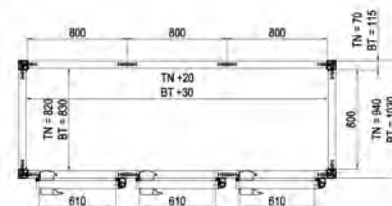

Vers. DD



Vers. DH



Vers. HH

MODULARITA'  
MODULARITY

**800 mm**


SPESSORE PANNELLO  
PANEL THICKNESS

**TEMPERATURA POSITIVA  
POSITIVE TEMPERATURE = 60 mm**


**BASSA TEMPERATURA  
LOW TEMPERATURE = 100 mm**




Vers. DDD

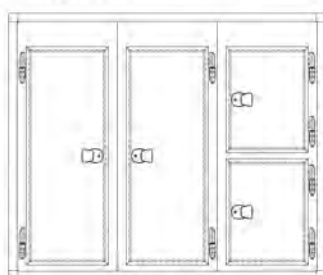

Vers. DDH

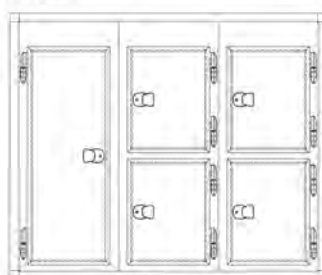

Vers. DHH

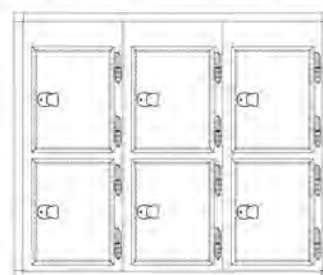

Vers. HHH

## OPZIONI OPTIONAL



Armadi frigoriferi per temperatura negativa: pannello spessore 100 mm (Mod. MBA-10);  
*Refrigerated cabinets for low temperature: panels thickness 100 mm (Mod. MBA-10);*

Battente Sp. 92 mm con resistenza riscaldante nella guarnizione;  
*Doorblade 92 mm thick with heating cable in door gasket;*

Armadi frigoriferi per temperatura positiva: pannello spessore 60 mm (Mod. MBA-06);  
*Refrigerated cabinets for positive temperature: panels thickness 60 mm (Mod. MBA-06);*

Battente Sp. 68 mm;  
*Doorblade 68 mm thick;*

Pannelli rivestiti con lamiera zinco-plasticata RAL 9010.  
*Panels covered RAL 9010 pvc coated steel sheet.*