

MTH LOADING RAMP 2.0



MTH LOADING RAMP 2.0 has a rotating edge, designed to guarantee easy use and high adaptability to different loading situations.

The manufacturing process, totally robotised, is the warranty of excellent quality and reliability. The hydraulic control unit is placed in the front part and allows easy check of the oil level.

The ramps MTH LOADING RAMP 2.0 are realized in compliance with the safety regulation EN 1398.


MTH LOADING RAMP 2.0 è una rampa di carico a spondina rotante, progettata per garantire facilità di impiego ed elevata adattabilità alle diverse situazioni di carico.

Il processo produttivo, totalmente robotizzato, è garanzia di eccellente qualità e di affidabilità nel tempo. La centralina idraulica, posizionata frontalmente, consente un'agevole verifica del livello dell'olio.

Le rampe MTH LOADING RAMP 2.0 sono realizzate in conformità alla norma di sicurezza EN 1398.

EN 1398



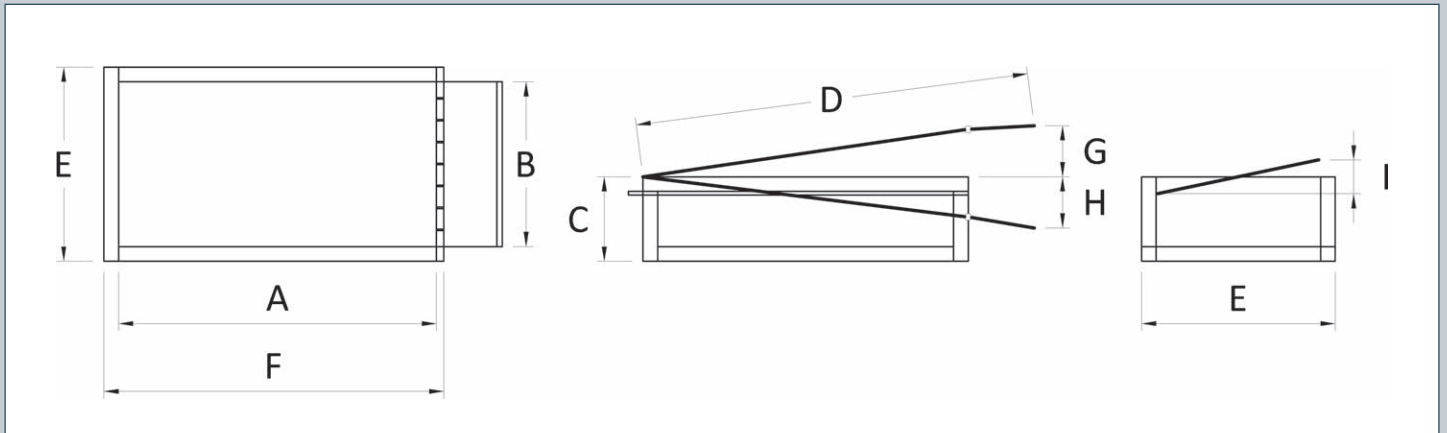

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Weight (kg)
AB1	2.000	1.750	600	2.340	1.930	2.170	290	290	90	745
AC1		2.000			2.180				95	785
AC3		2.000			2.180				95	785
AD3		2.200			2.380				100	820
BB1	2.500	1.750	600	2.840	1.930	2.670	360	300	110	845
BC1		2.000			2.180				120	890
BC3		2.000			2.180				120	890
BD3		2.200			2.380				125	930
CC1	3.000	2.000	600	3.340	2.180	3.170	410	300	135	1.010
CC3		2.000			2.180				135	1.010
CD3		2.200			2.380				140	1.055
DC1	3.400	2.000	600	3.740	2.180	3.570	450	300	150	1.210
DC3		2.000			2.180				150	1.210
DD3		2.200			2.380				155	1.260

Colour: BLU RAL 5010

