


# MTH<sup>®</sup>

360 LS



360 FLS




**SLIDING DOORS 360 LS & 360 FLS**

**PORTE SCORREVOLI 360 LS e 360 FLS**



**PATENT  
PENDING**

## DIMENSIONS - DIMENSIONI (mm)

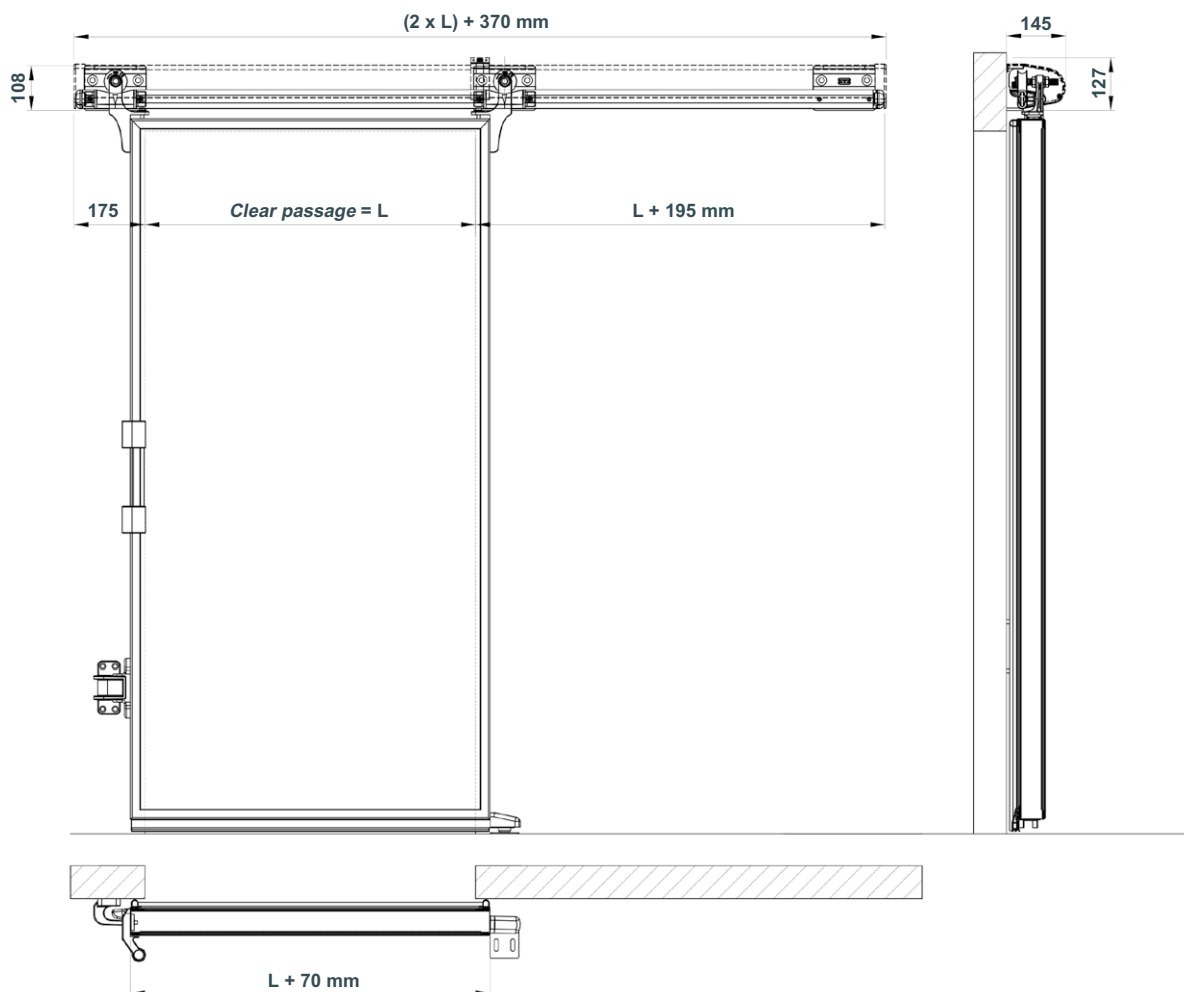

360 model sliding door has been designed for installation on positive temperature cold rooms. This door is available in one-blade manual sliding version, with aluminium blade edge, 68 mm thick and door size up to 1500 x 2500 mm.

The door is made in two different variants:

- **360 LS version without frame**
- **360 FLS version with frame**

The strong point of the 360 series is the innovative "LIGHT" sliding system, made of upper sliding system and pulleys.

It's possible to install this system with the same components on both door models.

### Standard composition:

- Aluminium door blade edge thk.68 mm
- PVC coated steel sheet finishing for food use
- Lateral external handle, internal plastic deep-set handle
- "LIGHT" sliding system
- Floor lower guide (**360 LS**)
- Wall side guide (**360 FLS**)
- PVC thermo welded frame - PVC counter frame on **360 FLS** version
- Floor-level threshold (S/2) (on demand for **360 FLS** version)
- Without threshold (S/3) (**360 LS - 360 FLS**)



La porta scorrevole modello 360 è stata progettata per installazioni su celle a temperatura positiva. Il modello di porta è disponibile in versione manuale ad un battente, di spessore 68 mm con bordo in alluminio e dimensioni fino a 1500 x 2500 mm.

La porta è realizzata in due varianti:

- **360 LS versione senza telaio**
- **360 FLS versione con telaio**

Punto di forza della serie 360 è l'innovativo sistema di scorrimento "LIGHT", composto da scorrimento superiore e carrucole.

Questo sistema può essere installato con i medesimi componenti su entrambi i modelli di porta.

### Composizione standard:

- Bordo battente in alluminio sp. 68 mm
- Specchiature in lamiera zinco-plasticata ad uso alimentare
- Maniglia esterna laterale, maniglia interna a vaschetta
- Sistema di scorrimento "LIGHT"
- Guida inferiore a pavimento (**360 LS**)
- Guida posteriore a parete (**360 FLS**)
- Telaio termosaldato in PVC - Controtelaio in PVC su versione **360 FLS**
- Soglia a raso pavimento (S/2) (su richiesta per versione **360 FLS**)
- Senza soglia (S/3) (**360 LS - 360 FLS**)